
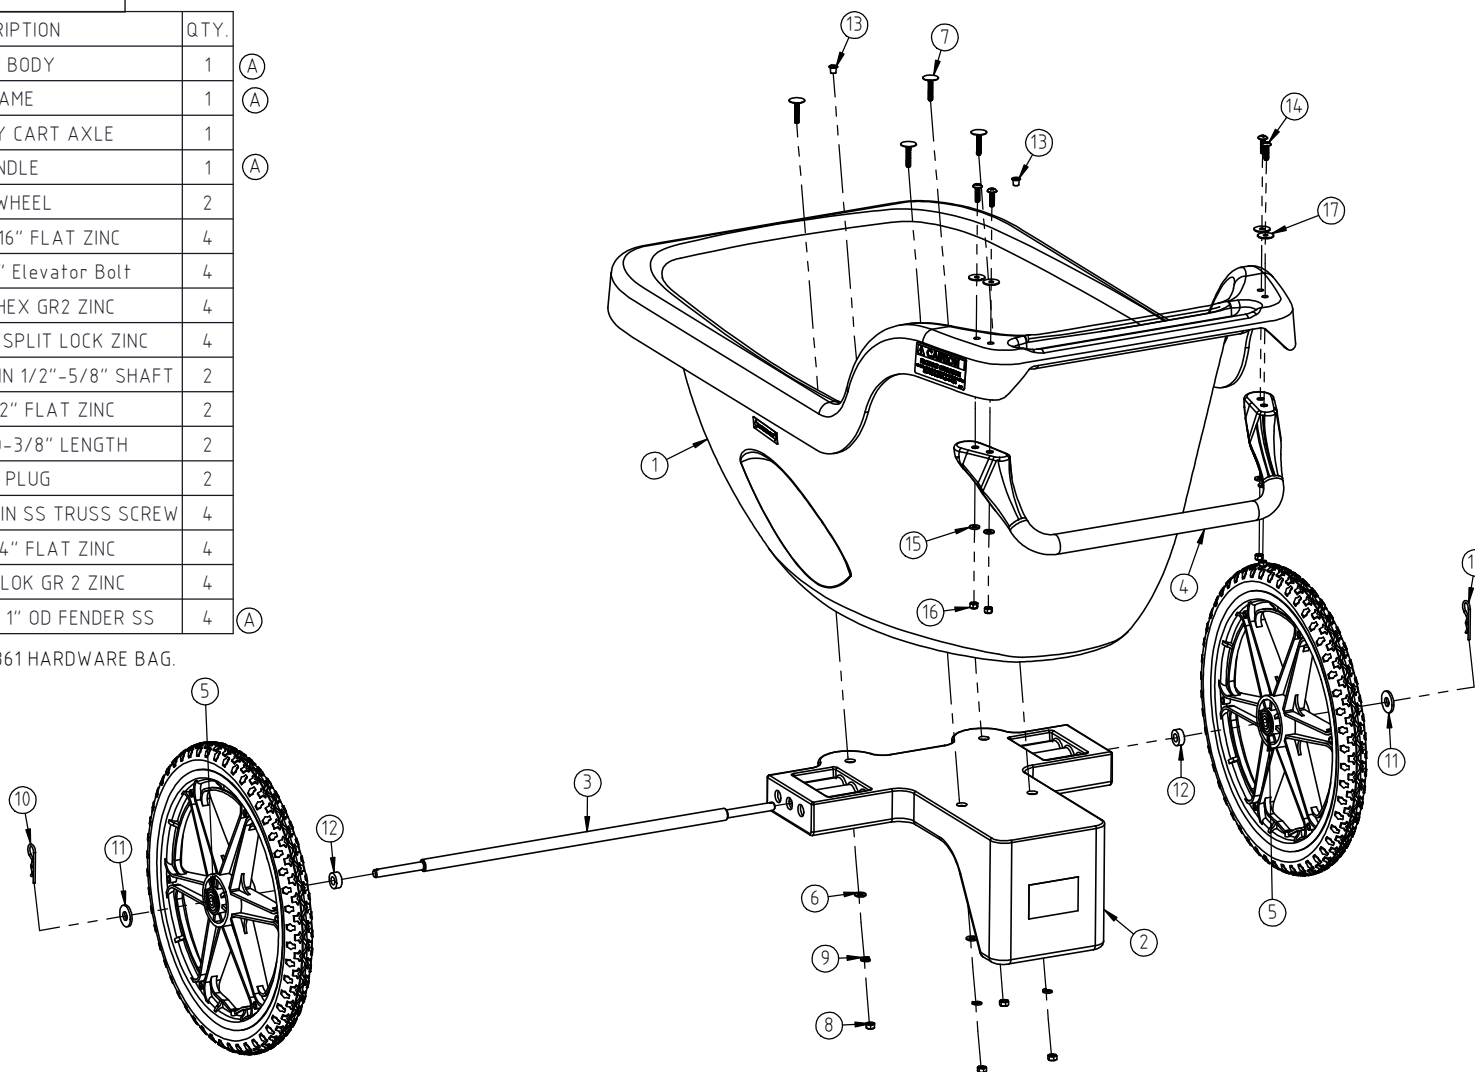








KEY	PART NUMBER	DESCRIPTION	QTY.
1	14335	CART BODY	1
2	14605	FRAME	1
3	14339	1/2" UTILITY CART AXLE	1
4	14607	HANDLE	1
5	14337	20" WHEEL	2
6	10320	WASHER, 5/16" FLAT ZINC	4
7	14334	5/16" x 1-1/2" Elevator Bolt	4
8	10939	NUT, 5-16" HEX GR2 ZINC	4
9	SJ10253	WASHER, 5/16" SPLIT LOCK ZINC	4
10	14356	HAIRPIN COTTER PIN 1/2"-5/8" SHAFT	2
11	10323	WASHER, 1/2" FLAT ZINC	2
12	14374	SPACER, 1"OD-3/8" LENGTH	2
13	14353	3/8" PLUG	2
14	14395	0.25-20 THREAD, 1 IN SS TRUSS SCREW	4
15	10626	WASHER, 1/4" FLAT ZINC	4
16	10213	NUT, 1/4" NYLOK GR 2 ZINC	4
17	14627	WASHER, 1/4" X 1" OD FENDER SS	4


ITEMS 6 THROUGH 13 INCLUDED IN 14361 HARDWARE BAG.

NOTE 1
DRAIN HOLES IN
CART BODY CAN
BE PLUGGED IF
DESIRED USING
PLUGS SUPPLIED
IN HARDWARE BAG.




				DRAWN / DATE ADH 6/16/15	MATERIAL	 Den Hartog INDUSTRIES, INC. Ace Roto-Mold Injection Molding Blow Molding Sowjoy 4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425
A	PRINT LAYOUT UPDATED. 14605 WAS 14336, 14607 WAS 14394. 14627 ADDED.	ADH 1/3/17	3338	APPRD. / DATE REH 7/10/15		
REV	DESCRIPTION	BY / DATE	CCN			
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION ANSI 14.5M		SHOT WEIGHT:	NOTES:	
POLYETHYLENE		METAL DECIMAL ± .125" FRACTION ± 1/4" ANGLE ± 1°		SHIPPING WEIGHT: 44.00 LBS		
±1% @ 68°F				FINISH:		
					DESCRIPTION	
					SCALE	N.S.
					PART NO.	UC007.5-28

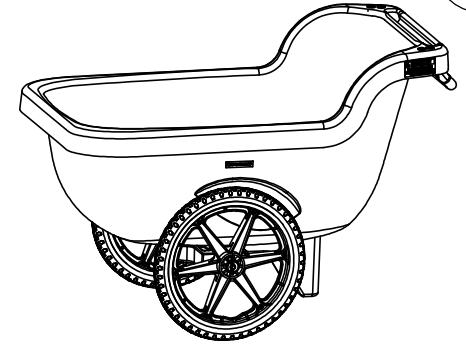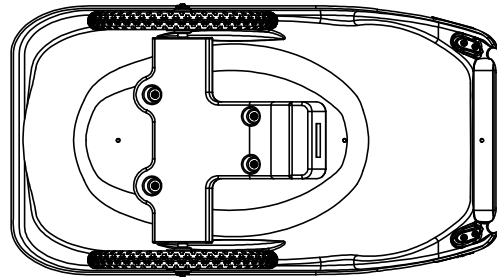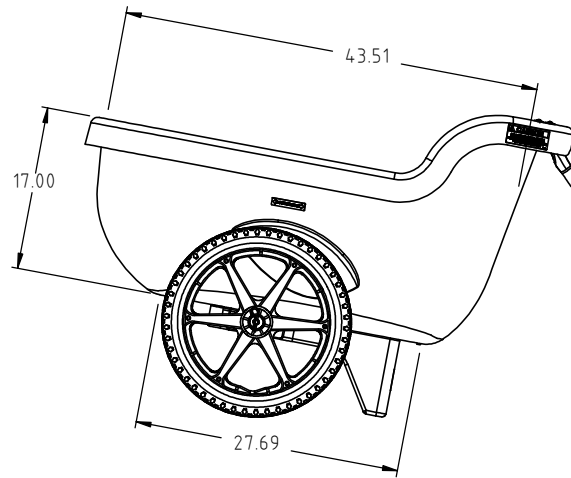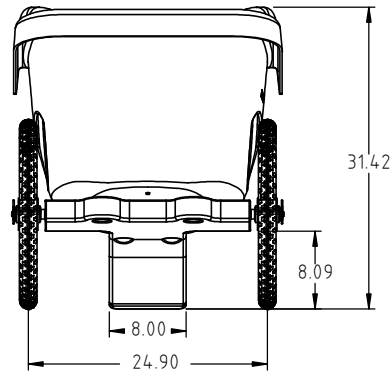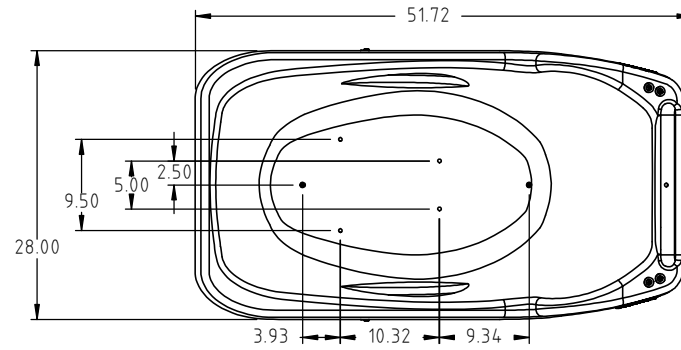

				DRAWN / DATE ADH 12/20/16	MATERIAL	 Den Hartog INDUSTRIES, INC. Ace Roto-Mold Injection Molding Blow Molding Sowjoy 4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425	
A	DIMENSIONS UPDATED FOR NEW FRAME AND HANDLE	ADH 1/3/17	3338	APPRD. / DATE REH 7/10/15			
REV	DESCRIPTION	BY / DATE	CCN	SHOT WEIGHT:	NOTES:	DESCRIPTION DHI UTILITY CART-2 of 2	
	ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED POLYETHYLENE	THIRD ANGLE PROJECTION ANSI 14.5M		SHIPPING WEIGHT:		SCALE N.S.	PART NO. UC007.5-28
	±1% @ 68°F			FINISH:			

STEP ONE:


Assemble one wheel (14337) on axle (14339) with a flat washer (10323) on the axle (14339) side of wheel (14337) and spacer (14374) on support sleeve (14375) side of wheel (14337). Slide resulting assembly together and clip cotter pin (14356) through hole in axle (14339).

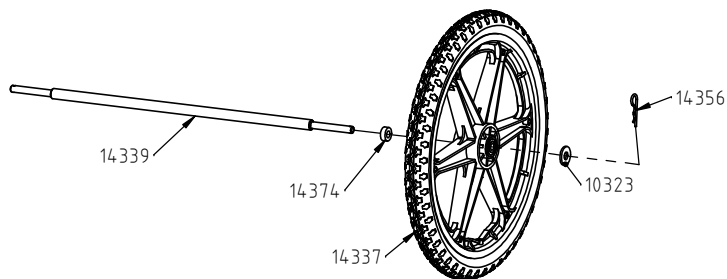

STEP TWO:


Slide axle assembly from step one through center holes (see note below) of frame (14605). Assemble remaining wheel (14337) on axle by installing a spacer (14374) between the frame (14605) and the wheel (14337) and a flat washer (10323) on the other side of the wheel (14337). Secure assembled wheels and axle to frame with hitch pin clip (14356).

NOTE: Cart balance may be adjusted by repeating Step 2 but with the Axle located in the forward or rearward holes.

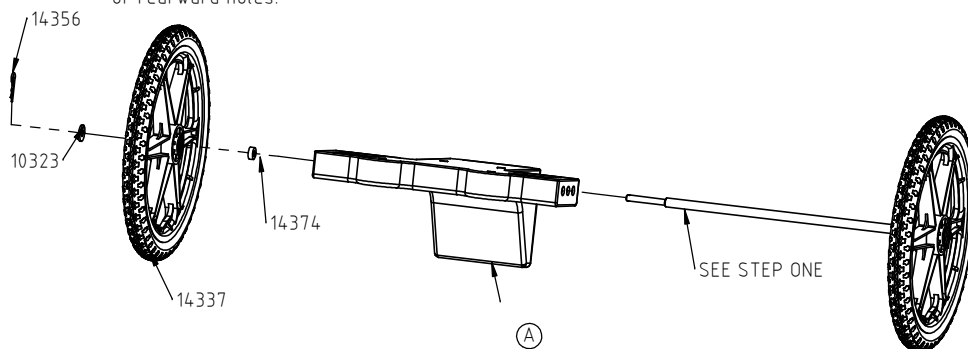

STEP THREE

With cart body (14335) on one side, align a frame (14605) hole with the corresponding body hole. Install one bolt (14334) with head to the inside of the body. Install flat washer (10320), lock washer (SJ10253), and hex nut (10939). Do not tighten until all bolts have been installed. Install remaining bolts then tighten until bolt heads are flush on the inside of the body.

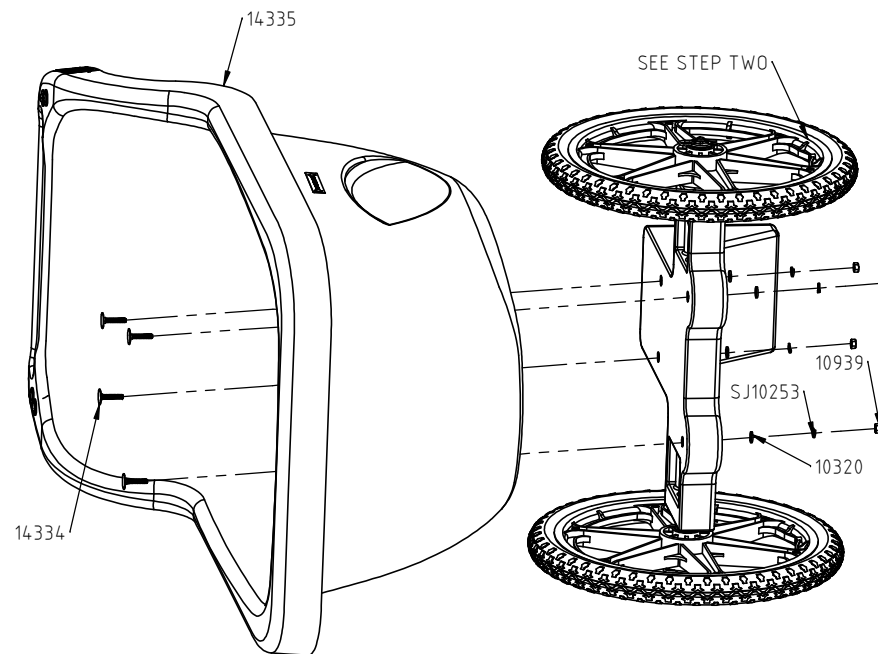

UC007A

A

				DRAWN / DATE ADH 6/30/15	MATERIAL
A	14605 WAS 14336, 14607 WAS 14394.	ADH 1/3/17	3338	APPRD. / DATE REH 7/13/15	
REV	DESCRIPTION	BY / DATE	CCN		
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION ANSI 14.5M		SHOT WEIGHT:	NOTES:
POLYETHYLENE ±1% @ 68°F		METAL DECIMAL ± .125" FRACTION ± 1/4" ANGLE ± 1°		SHIPPING WEIGHT:	1.) INCLUDED PLUGS (14353) CAN BE INSERTED INTO DRAIN HOLES.
				FINISH:	



Den Hartog
INDUSTRIES, INC.

Ace Roto-Mold Injection Molding Blow Molding Sowjoy






4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425





DESCRIPTION UC007.5-28 UTILITY CART ASSEMBLY INSTRUCTIONS


SCALE N.S.




PART NO. UC007A

UC007.5-28 COMPONENT DIAGRAM

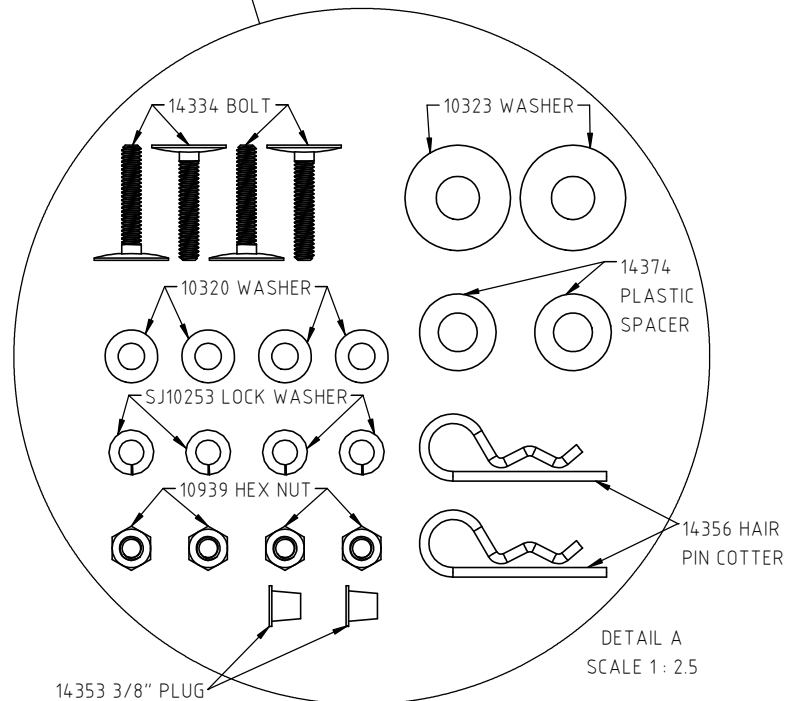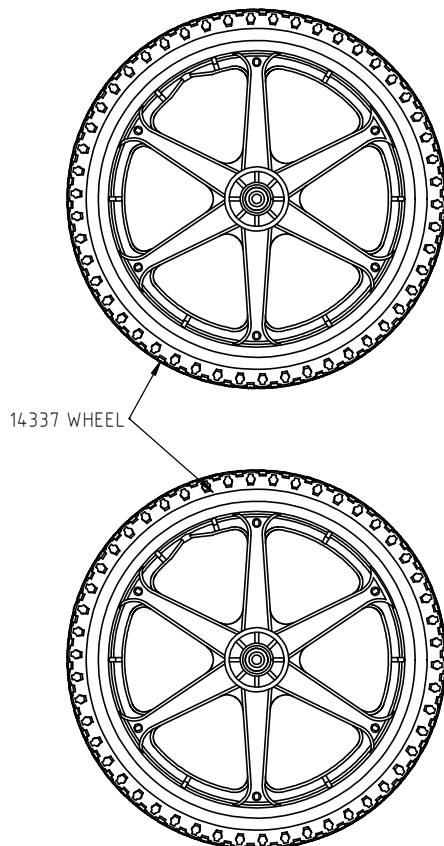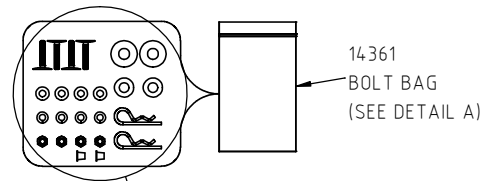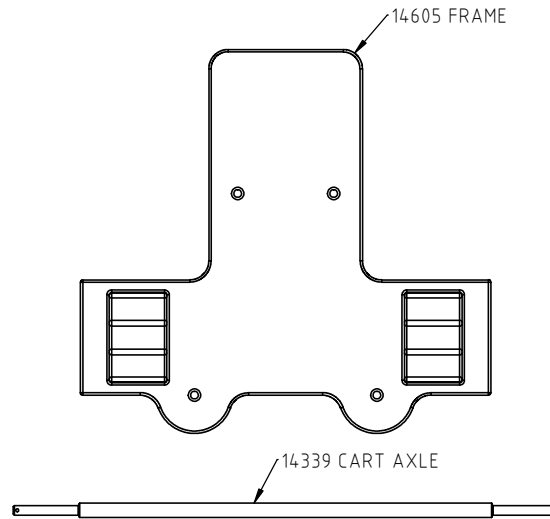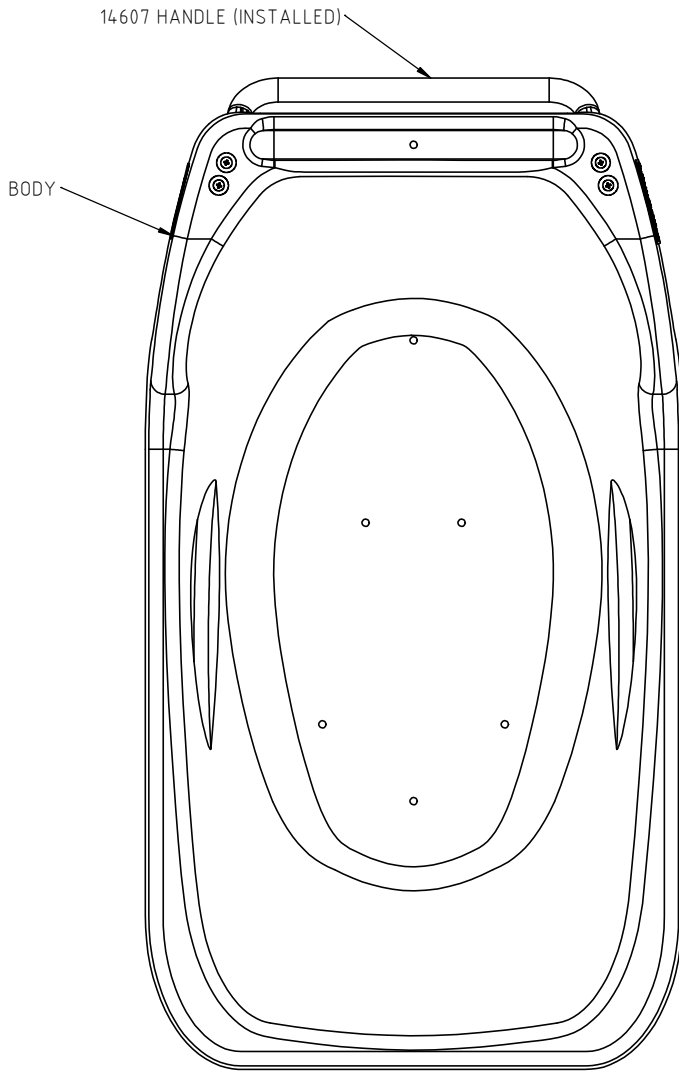


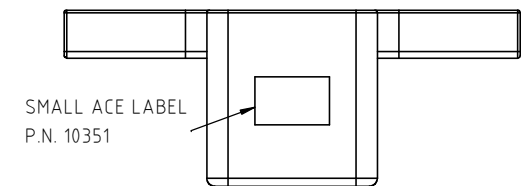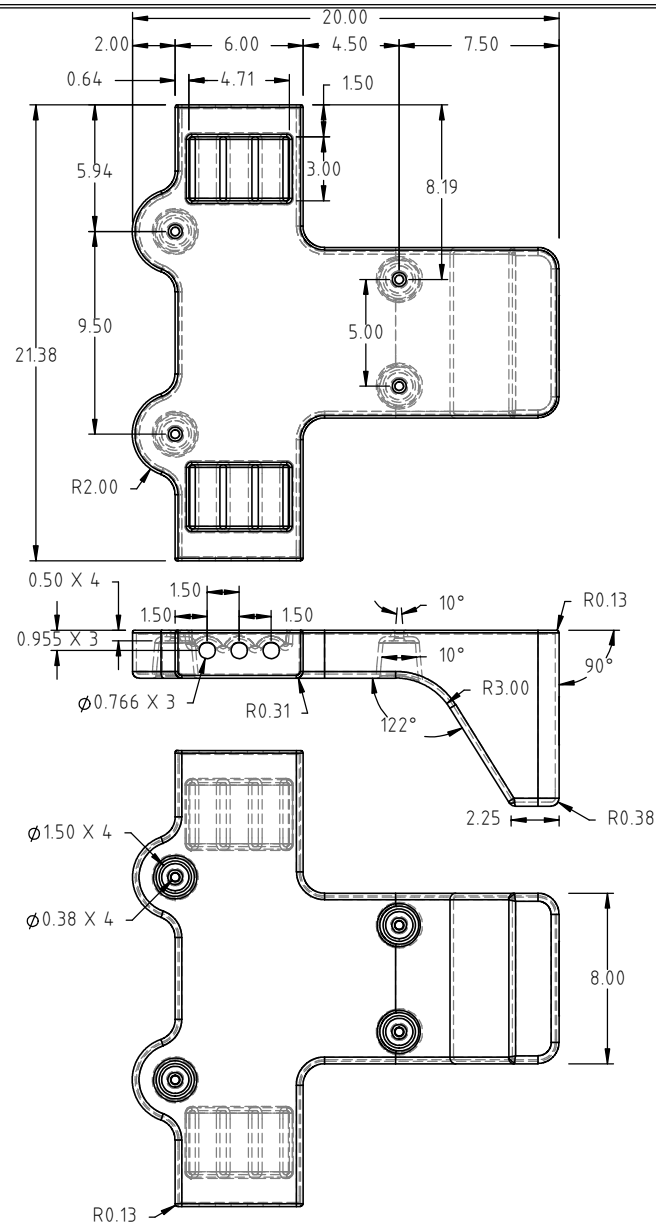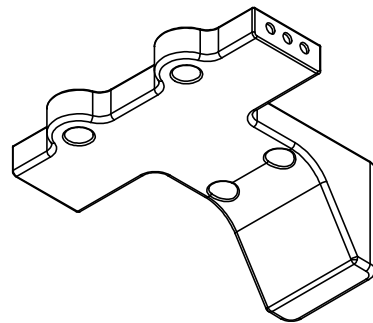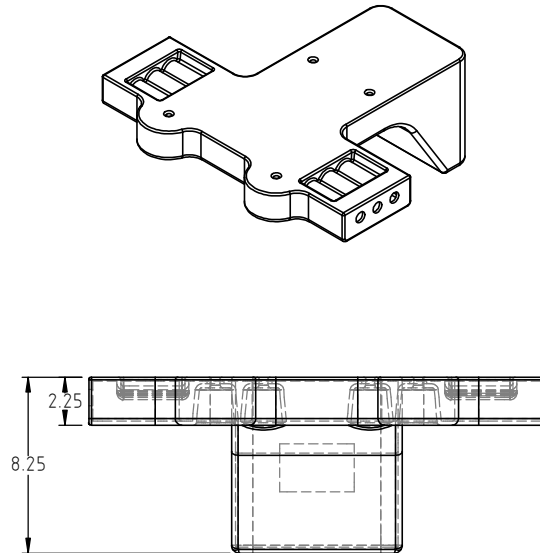

				DRAWN / DATE ADH 6/16/15	MATERIAL (A) 11017 PRIMARY 10546 SECONDARY	 Den Hartog INDUSTRIES, INC. Ace Roto-Mold Injection Molding Blow Molding Sowjoy 4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425
A	11017 MATERIAL MADE PRIMARY AND 10546 MATERIAL MADE SECONDARY.	ADH 10/10/17	3442	APPRD. / DATE REH 7/10/15		
REV	DESCRIPTION	BY / DATE	CCN			
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION ANSI 14.5M		SHOT WEIGHT: 4.75 LBS.	NOTES: 1.) 0.18 WALL 2. BLACK IS STD. COLOR	
<u>POLYETHYLENE</u> ±1% @ 68°F				SHIPPING WEIGHT: 4.75 LBS.		
				FINISH: SAND BLAST		
DESCRIPTION					DHI UTILITY CART - CART FRAME-SHORT	
SCALE N.S.		PART NO. 14605				

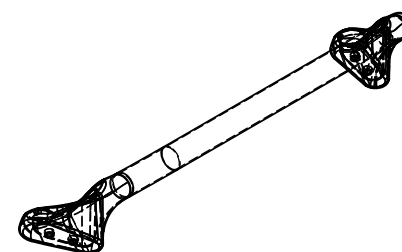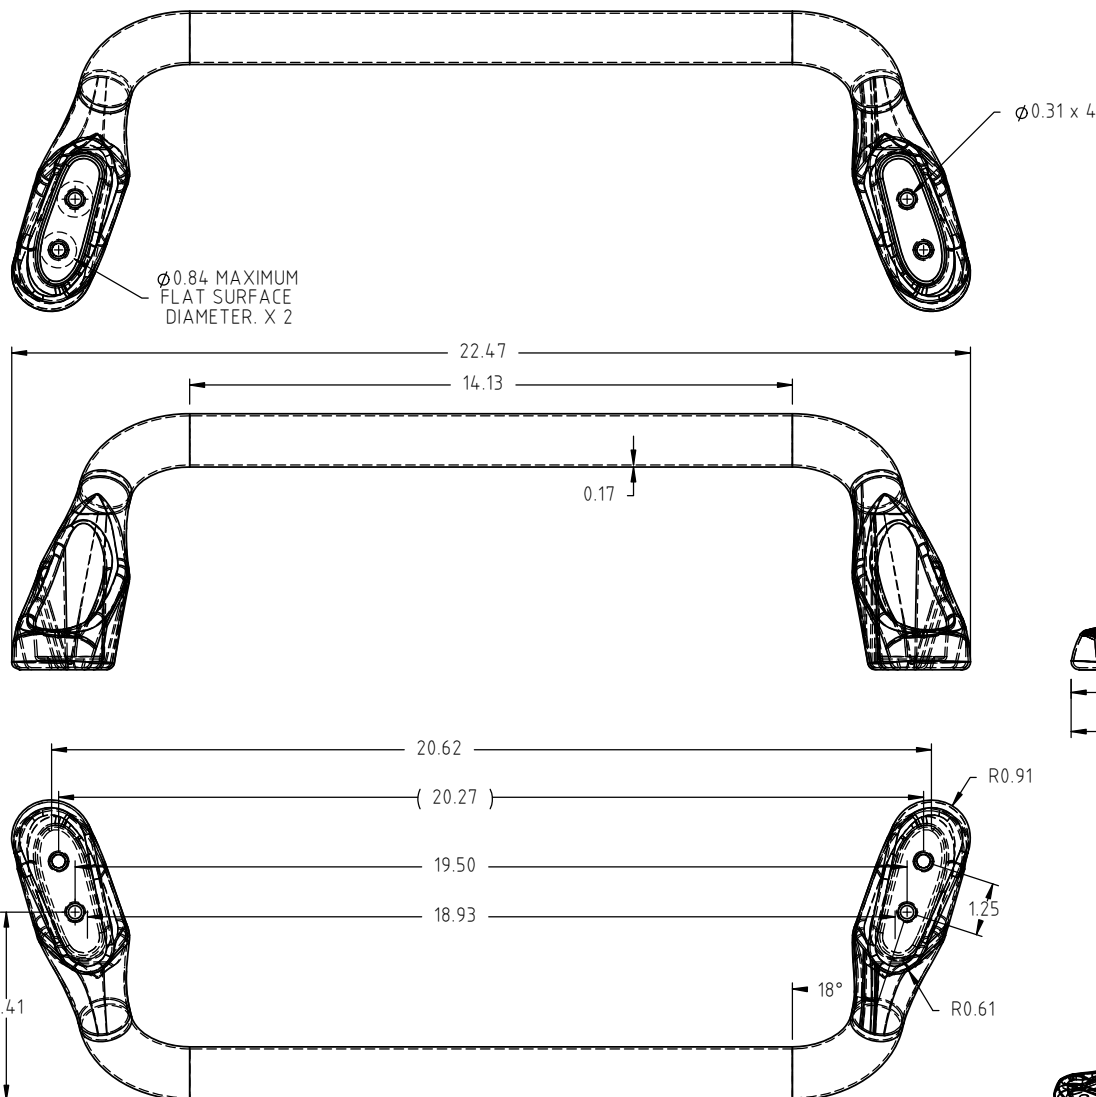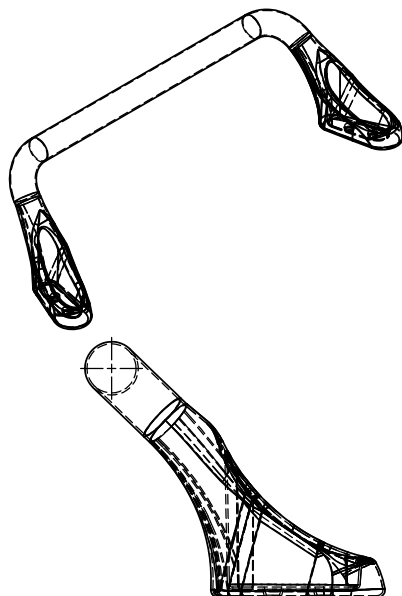

REV	DESCRIPTION	BY / DATE	CCN	DRAWN / DATE	MATERIAL
				ADH 11/7/16	
				APPRD. / DATE	80007
				REH 1/3/17	
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED				SHOT WEIGHT: 0.95 LB.	NOTES:
POLYETHYLENE				SHIPPING WEIGHT: 0.95 LB.	1.) BLACK COLOR
$\pm 1\%$ @ 68°F				FINISH: TRIM EDGES.	2.) 0.17 NOM. WALL









Den Hartog
INDUSTRIES, INC.

Ace Roto-Mold Injection Molding Blow Molding Sowjoy

4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425

DESCRIPTION	
UTILITY CART BOTTOM HANDLE	
SCALE	PART NO.
N.S.	14607

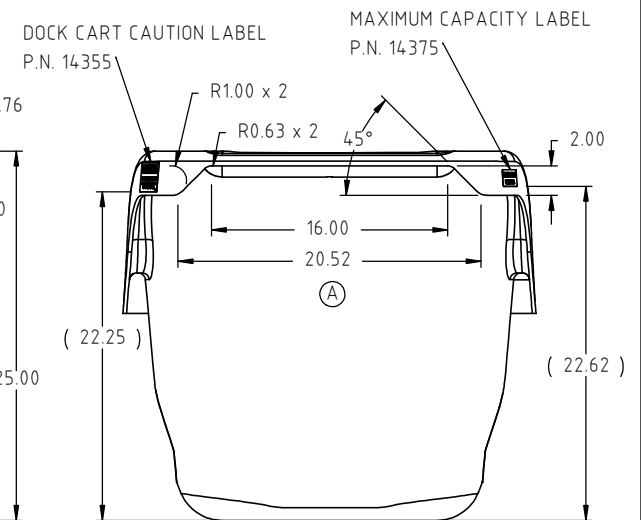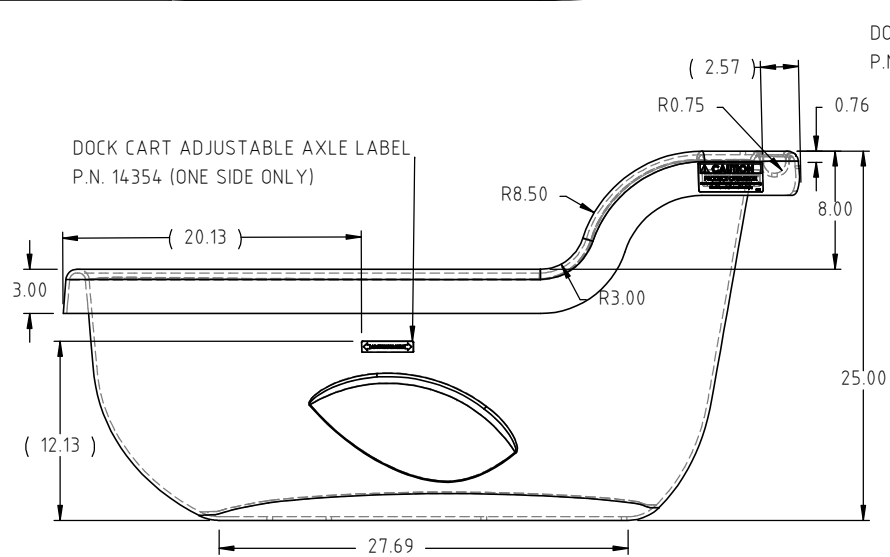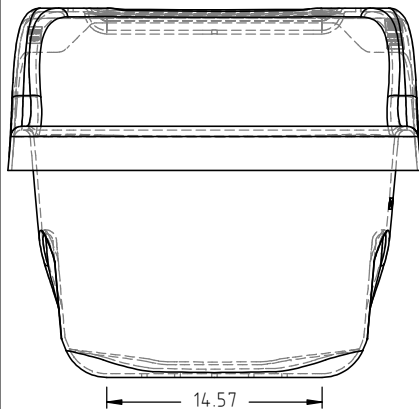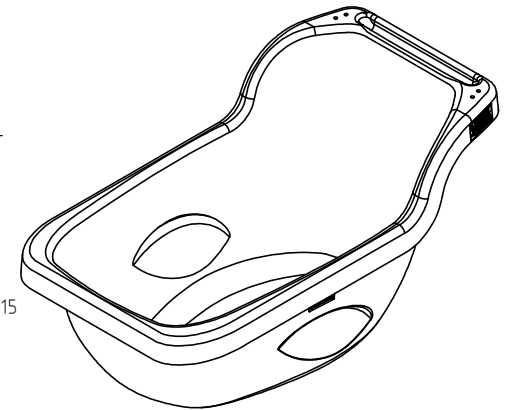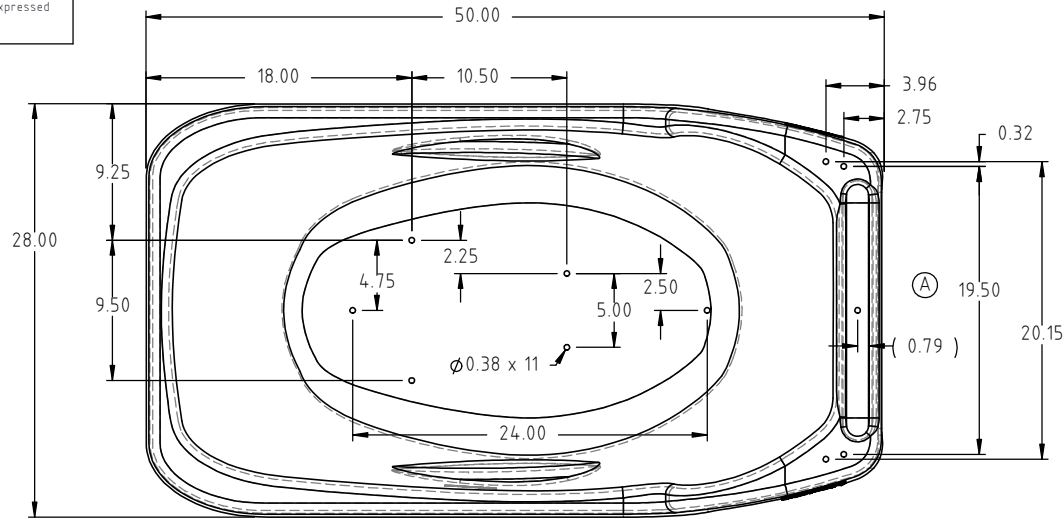

				DRAWN / DATE ADH 6/16/15	MATERIAL 10546	 Den Hartog INDUSTRIES, INC. Ace Roto-Mold Injection Molding Blow Molding Sowjoy 4010 HOSPERS DRIVE S. BOX 425, HOSPERS, IOWA 51238-0425
A	DIMENSIONS CORRECTED, HANDLE CUTOOT AND HOLES DETAILS ADDED.	ADH 2/22/17	3338	APPRD. / DATE REH 7/10/15		
REV	DESCRIPTION	BY / DATE	CCN			
ALL DIMENSIONS ARE IN DECIMAL INCHES TOLERANCES UNLESS OTHERWISE SPECIFIED		THIRD ANGLE PROJECTION ANSI 14.5M		SHOT WEIGHT: 30 LBS. PER CAVITY	NOTES: 1.) 200 WALL 2. BLACK IS STD. COLOR	DESCRIPTION DHI UTILITY CART-CART BODY
POLYETHYLENE ±1% @ 68°F		METAL DECIMAL ± .125" FRACTION ± 1/4" ANGLE ± 1°		SHIPPING WEIGHT: 27 LBS.		SCALE N.S.
				FINISH: SMOOTH ALL SHARP EDGES		PART NO. 14335