

# Ace Roto-Mold

December 2018

## PRODUCT RELEASE

### 16" Hinged Lid Vented or Non-Vented



#### Specifications:

- Shipping weight of Lid assembly is 5.5 lbs.

#### Features:

- Designed to be a direct replacement for the DHI non-hinged threaded lid as well as current competitive 16" lids.
- Manufactured from No Break Polypropylene resin.
- Available in both vented and non-vented configurations.
  - Vented lids offer equivalent air flow of a 4" fitting.
- Complete with O-rings and gaskets to prevent spills during transport, etc.
  - O-rings are manufactured from Buna-N-Rubber.
  - Tank to lid seal is manufactured from closed cell crosslink foam.
- Lids and gaskets may be utilized in applications where chemical contact is approved with known chemical resistivity data for the materials specified above.
- Maximum sustained internal pressure of 1/2 PSI.
- Gravity float to reduce fluid leakage in the event of roll overs.
- Lid engagement is bayonet style with only 1/8 turn to close.
- A provision for securing the lid with a lock or hitch pin is provided.
- Lid body is black in color with a safety blue hinge arm.



**Den Hartog**  
INDUSTRIES, INC.  
"Always at Your Service"

Ph: 800-342-3408  
Fax: 712-752-8222



[www.denhartogindustries.com](http://www.denhartogindustries.com)  
[sales@denhartogindustries.com](mailto:sales@denhartogindustries.com)

4010 Hospers Dr. South  
Hospers, IA 51238

# 16" Hinged Lid

## SPECIFICATIONS

16" Hinged Lid Assembly  
Vented  
Product Number: 14761

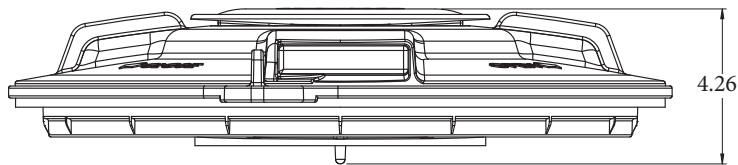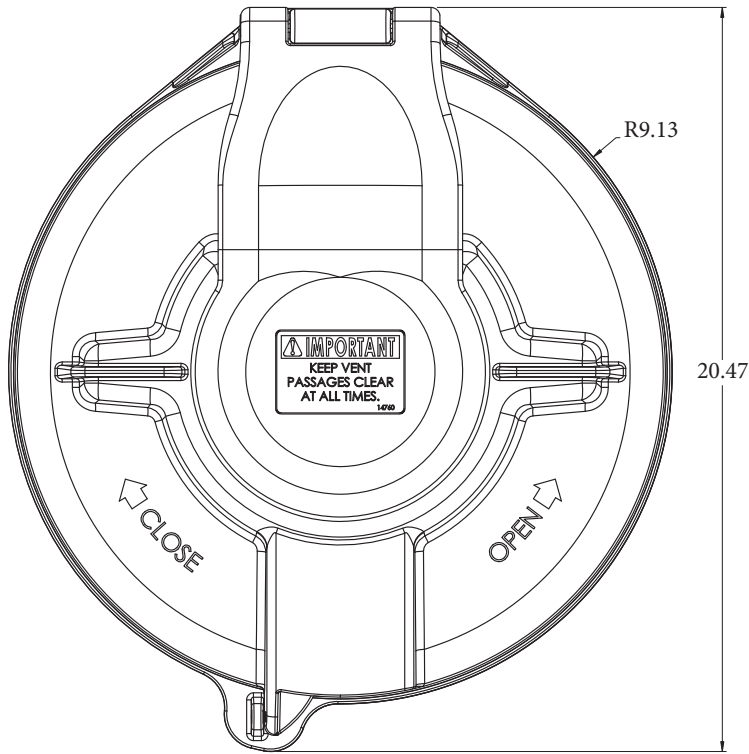

16" Hinged Lid Assembly  
Non-Vented  
Product Number: 14762

