



PRODUCT RELEASE


6" Threaded Cap Ported or Non-Ported



6" Cap without Port



6" Cap with 2" NPS Port

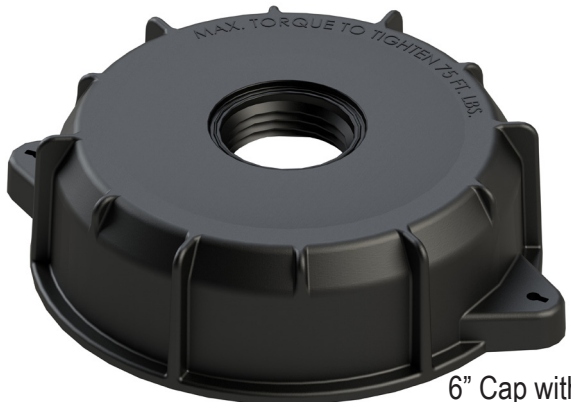

6" Cap with Buttress Port

Features:

- Available with no top port or single 2-2.5" modified buttress threads or single 2" NPS threads in top port.
- Rated for maximum internal pressure of 15 PSI.
 - Applications requiring pressure leak or pressure loss testing such as that required for UN compliance.
 - UN regulated tanks, totes and IBC products.
- Furnished with a gasket.
 - Santoprene grade 55 durometer gasket is standard (black in color).
 - Viton 75-80 gasket is optional (brown in color).
- Manufactured from HDPE:
 - Resin meets FDA 21 CFR 177.1520, ASTM D4976 – PE 233 and UL94HB specifications.
- Maximum torque for tightening is 75 ft. lbs.
(note: pressure rating and tightening torque specification is dependent upon mating male thread fit up and quality).

Specifications:

- Shipping weight of Cap and Gasket assembly is 1.2 lb.



Den Hartog
INDUSTRIES, INC.
"Always at Your Service"




Warning: Cancer and Reproductive Harm.
www.P65Warnings.ca.gov


6" Threaded Cap

SPECIFICATIONS








6" Cap without Port and Gasket Assembly Santoprene or Viton

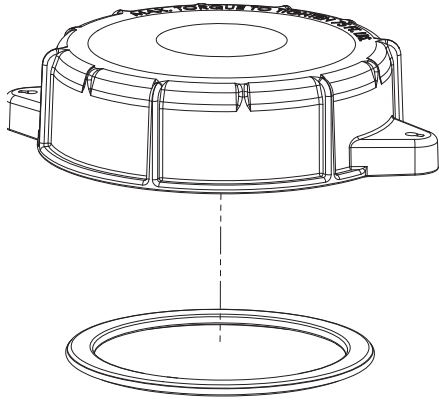

6" Cap - 2" NPS Thread and Gasket Assembly Santoprene or Viton

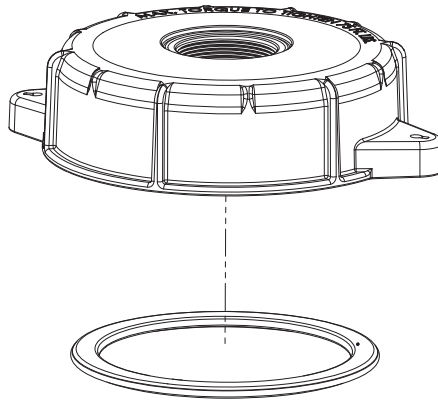

6" Cap - 2-2.5" Buttress Thread and Gasket Assembly Santoprene or Viton

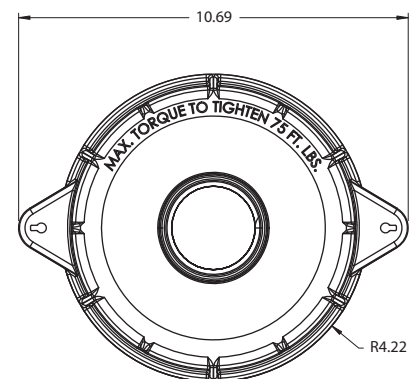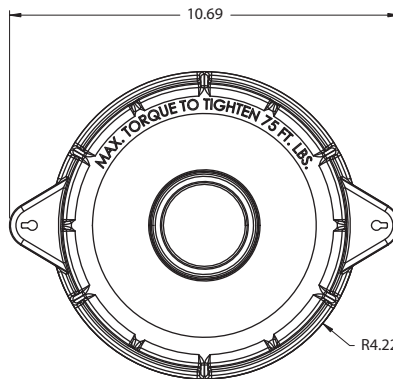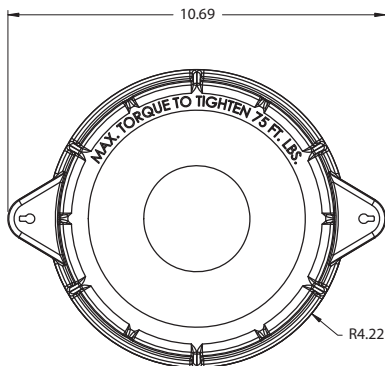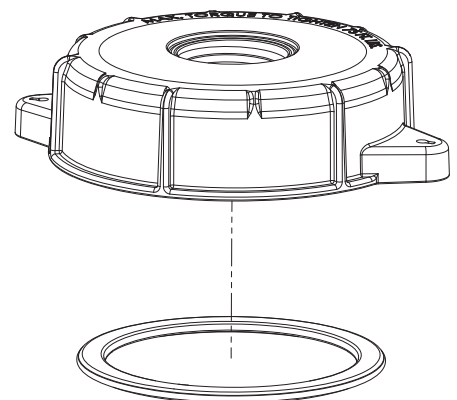

 **Den Hartog**
INDUSTRIES, INC.
"Always at Your Service"



Warning: Cancer and Reproductive Harm.
www.P65Warnings.ca.gov

Ph: 800-342-3408
Fax: 712-752-8222

www.denhartogindustries.com
sales@denhartogindustries.com

4010 Hospers Dr. South
Hospers, IA 51238